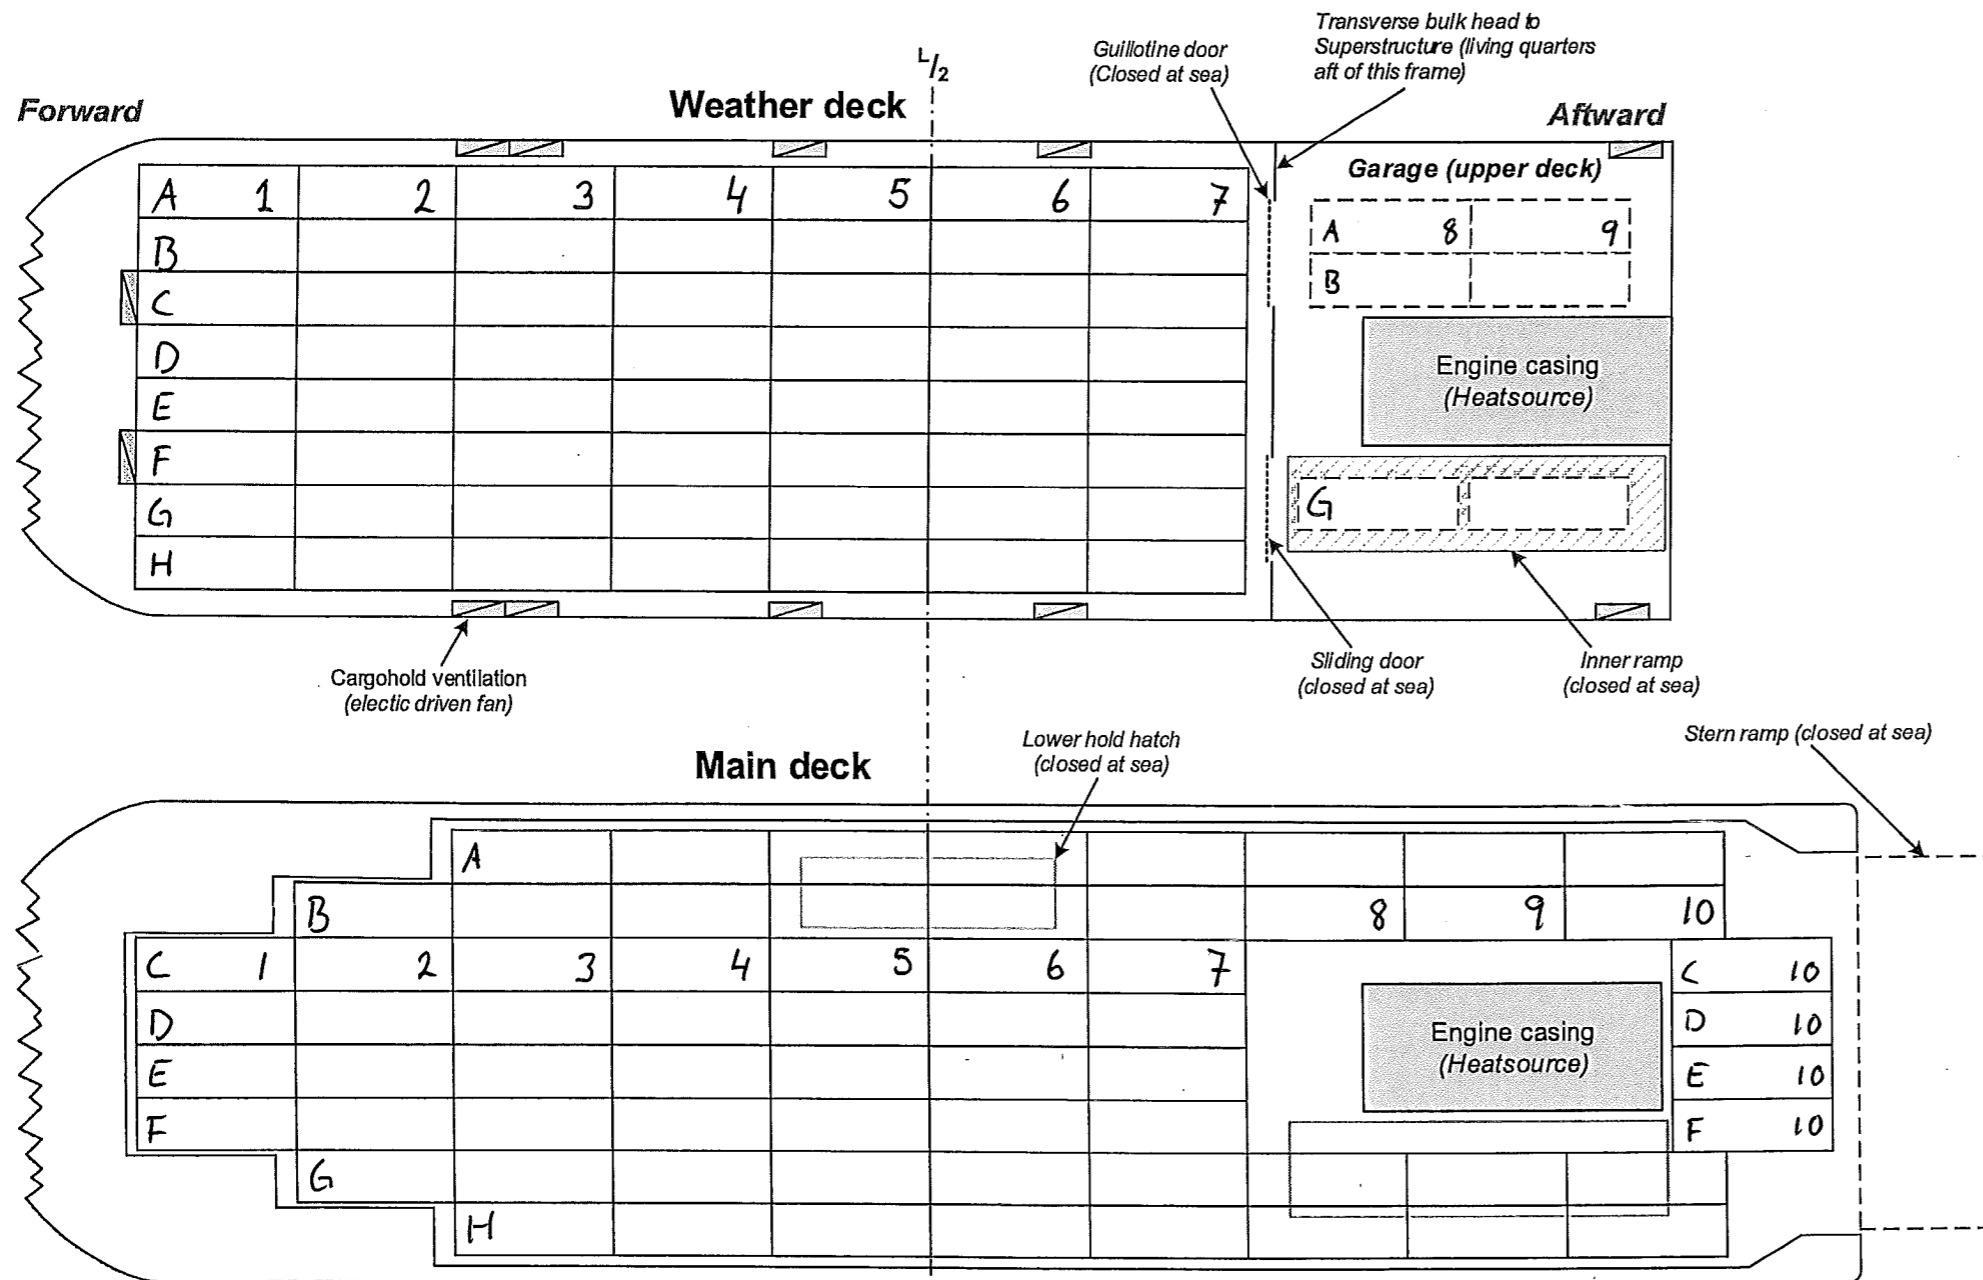


Dangerous goods loadingplan (RoRo)



Förutsättningar: Lasta enheterna angivna i (Loadinglist)!
 Samtliga enheter på lastlistan skall lossas i samma hamn. Fläkthus till (cargohold ventilation) samt hela (Main deck) är att betrakta som *living quarter*. Tips! Läs allmänna stuvningsbestämmelser!!!

Följande punkter skall vara uppfyllda för godkänt:

- Bestäm segregationsgraden mellan respektive enhet (1-7) i farligtgodskrysset.
- Markera i lastplanen var respektive enhet skall stuvas.

- Genomförd uppgift skickas

VIA MOODLE I INLÄMNINGSFORUM.

Information:

Watertight and fire resistant bulkheads/decks/ramps/doors between all decks and garage. Max 12 passengers.
 Cargo hold fans = 16 changes/hour
 "Lower hold" is not approved for stowage of dangerous goods

Fire fighting and protection



Weather deck = fixed watercannons (*no foam*)

1. forward and 2. aftward.

Garage = Drencher system (*water, with foamoption*)

Main deck = Drencher system (*water, with foamoption*)

Lower hold = CO₂

 = Trailerposition (15*3m)  = 2*20' mafi (15*3m)

| Farligtgodskryss | (1) | (2) | (3) | (4) | (5) | (6) | (7) |
|------------------|-----|-----|-----|-----|-----|-----|-----|
| (1) | X | | | | | | |
| (2) | | X | | | | | |
| (3) | | | X | | | | |
| (4) | | | | X | | | |
| (5) | | | | | X | | |
| (6) | | | | | | X | |
| (7) | | | | | | | X |

| Dangerous goods (Loadinglist) | | | | | | | | | |
|-------------------------------|---|-------------------|-------|--|-------|-------------|------|----------|-----------------------|
| | Id/Unit type: | Net. weight (ton) | UN-nr | Proper shipping name | Class | Sub. class. | P.gr | EmS | Stow and segregation. |
| | | | (1) | (2) | (3) | (4) | (5) | (15) | (16 a+b) |
| (1) | 20' ISO-container on mafi. (Closed CTU) | 5,8 | 1694 | BROMOBENZYL CYANIDES LIQUID | 6.1 | - | I | F-A, S-A | |
| (2) | Trailer (Closed CTU) | 6,2 | 1028 | DICHLORODIFLOUROMETHANE (REFRIGERANT GAS R 12) | 2.2 | - | - | F-C, S-V | |
| (3) | Trailer (Closed CTU) | 9,6 | 1989 | ALDEHYDES, N.O.S. | 3 | - | I | F-E, S-D | |
| (4) | 23' IMO-tank on mafi. (Closed CTU) | 16,7 | 3286 | FLAMMABLE LIQUID, TOXIC, CORROSIVE, N.O.S. | 3 | 6.1/8 | II | F-E, S-C | |
| (5) | 20' ISO-container on mafi. (Closed CTU) | 2,4 | 0234 | SODIUM DINITRO-o-CRESOLATE dry or wetted with less than..... | 1.3C | 6.1/P | - | F-B, S-Z | |
| (6) | 23' IMO-tank on mafi. (Closed CTU) | 11,3 | 3266 | CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S. | 8 | - | II | F-A, S-B | |
| (7) | Trailer (Closed CTU) | 12,8 | 1490 | POTASSIUM PERMANGANTE | 5.1 | - | II | F-H, S-Q | |

| Examinations-uppgift: | | | |
|-----------------------|--|------------------------|--|
| | | DANGEROUS GOODS (RoRo) | |